




LG Alert™

Rollover Warning System

- Rollover warning device and driver training aid.
- Provides audible and visual alarms.
- Adjustable sensitivity.
- Can be installed in under 1 hour.
- Proven technology.
- Can help maintain operational readiness, and reduce injuries and medical costs caused by preventable rollovers.

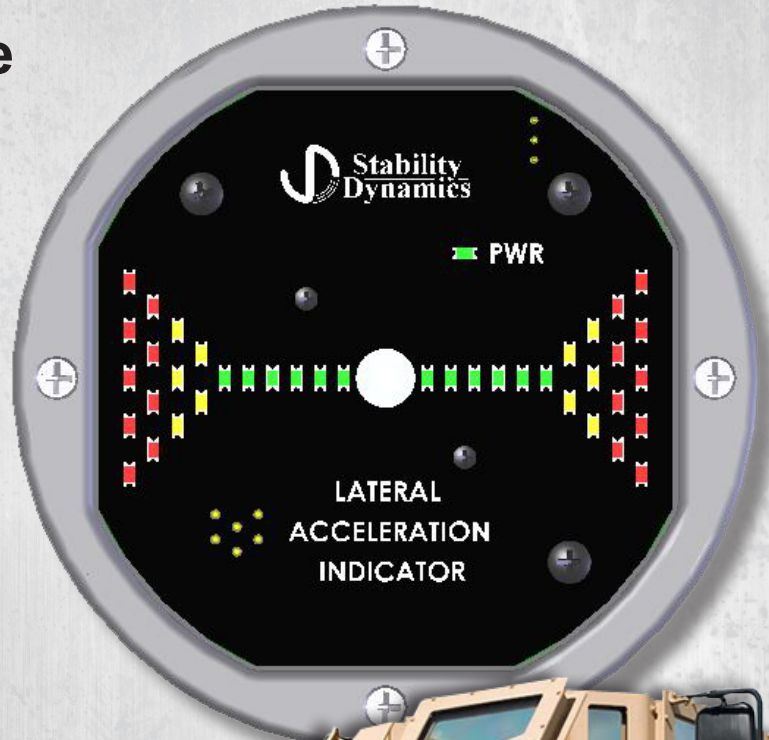

GSA Approved
#GS-30F-0033X

GSA



www.stabilitydynamics.com

Technical Specifications:

Weight

3.5 lbs

Environmental

Operating Temp (°F): -25°F to +130°F

Ingress Protection: IP67 (IEC 60529)

Electrical

Supply Voltage: +12VDC

Voltage Protection: ±15VDC Max.

Supply Current: 2.0A Max

Fuse Rating: 3.0A

Response Filtering

Display Indication: > 1.0 Hz

Signal Outputs: > 8.0 Hz

Sensitivity Settings (Full Scale)

Lateral Acceleration: 0.17g to 1.00g

Static Tilt Angle: 10° to 90°


Alarm Levels

<u>Level</u>	<u>Visual</u>	<u>Audible</u>
1 to 6	Green, Steady	None
7	Yellow, Steady	None
8	Yellow, Steady	82dB (Display)
9	Red, Steady	82dB (Display)
10	Red, Flashing	100dB (Remote Horn)

Optional Equipment

24VDC Power Supply

Data Acquisition Capability

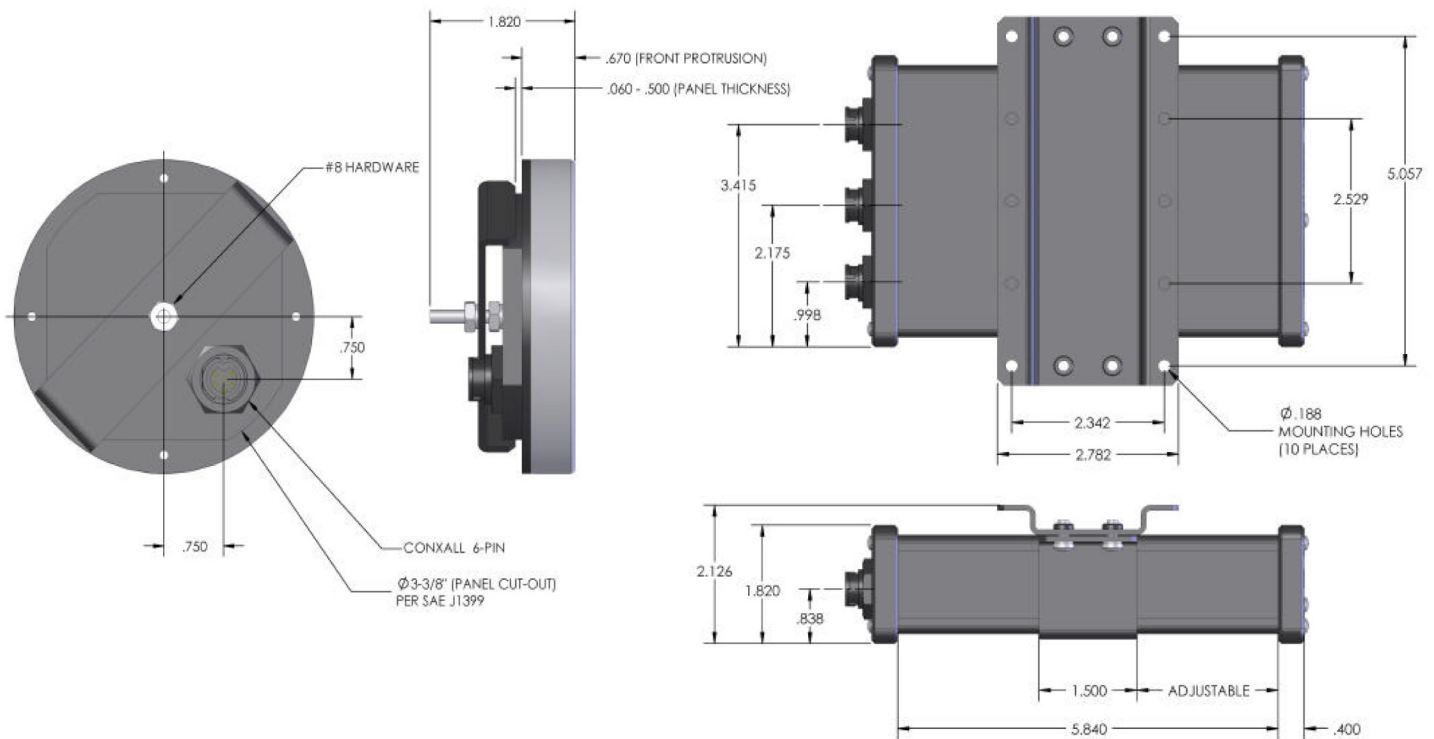

Dimensions are in inches. Stability Dynamics reserves the right to change the design and specifications of its products without notice. Illustrations may include optional equipment and accessories.



10 Trent Drive, Campbellford, Ontario,
Canada K0L 1L0
Tel: (705) 653-0775 Fax: (705) 653-4732
Email: info@stabilitydynamics.com
Website: www.stabilitydynamics.com